

Neck Guides

In Stock items (subject to prior sales)

Neck Guides for PET Containers


Helps guide PET containers in high speed, air conveying applications. Nolu-SR is a proprietary blend of UHMW and other USDA accepted lubricants, resulting in a harder, lower friction material that is ideal in these applications. Though designs differ, the material of choice is Nolu-SR, proven to increase throughput, reduce jams and wear longer.

OEM's Choice!


- 10+ years
- World's leading supplier

Dimensioned profiles drawn to scale.

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.

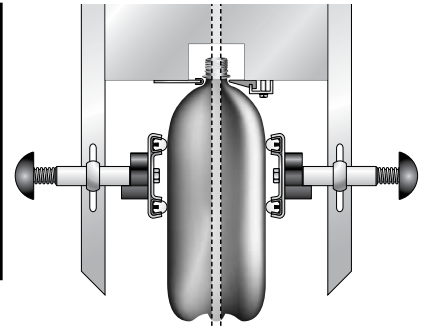

NG47




Neck Guide
Clips onto 11 ga. (.120) sheet metal.



Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG47-SR-100	100*
VG-NG47-SR-250	250*

P105F




Neck Guide
Clips onto 13 ga. (.090) or 14 ga. (.073) sheet metal.



Material: Nolu-SR.	
Part Number	Length (ft.)
VG-P105F-SR-100	100*
VG-P105F-SR-250	250*

P105R




Neck Guide
Clips onto 13 ga. (.090) or 14 ga. (.073) sheet metal.



Material: Grey Nolu-S or Grey Nolu-SR.		
Nolu-S	Nolu-SR (reinforced)	Length (ft.)
VG-P105R-100	VG-P105RCL-100	100*
VG-P105R-250	VG-P105RCL-250	250*

NG49




Neck Guide
Clips onto 13 ga. (.090) or 14 ga. (.073) sheet metal.



Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG49-SR-100	100*
VG-NG49-SR-250	250*

NG50




Neck Guide
Clips onto 13 ga. (.090) or 14 ga. (.073) sheet metal.



Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG50-SR-100	100*
VG-NG50-SR-250	250*

NG81




Neck Guide
Clips onto 11 ga. (.120) sheet metal.



Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG81-SR-100	100*
VG-NG81-SR-250	250*

NG91




Neck Guide
Replacement for various European equipment manufacturers.

Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG91-SR-10	10
VG-NG91-SR-20	20

Also available in curves. See below.

NG110




Neck Guide
Replacement for various European equipment manufacturers.

Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG110-SR-10	10
VG-NG110-SR-20	20

Also available in curves. See below.

NG125




Neck Guide
Replacement for various European equipment manufacturers.

Material: Nolu-SR.	
Part Number	Length (ft.)
VG-NG125-SR-10	10
VG-NG125-SR-20	20

Also available in curves. See below.

Neck Guide Curve (2 pieces)

Machined inside and outside curves. Replacement for various European equipment manufacturers. Other special order radii available.

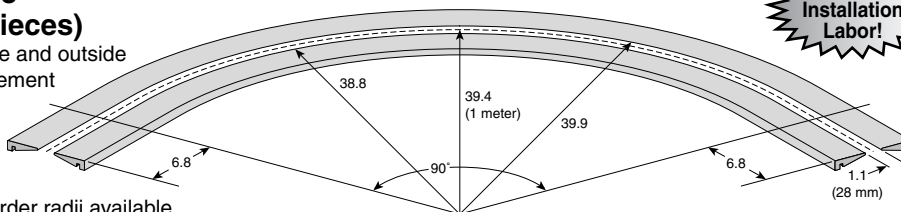

Reduced Installation Labor!

Material: Nolu-SR.	
Part Number	
VG-NG91-SR-1M28	
VG-NG110-SR-1M28	
VG-NG125-SR-1M28	

Shown in drawing to the left.

UHMW Covers & Aluminum Rails


Bottle Guides




In Stock items (subject to prior sales)

Bottle Guide

Aluminum guide rail with Nolu-S insert is used to guide containers, especially PET, in applications such as air conveying. Many air conveyor users and manufacturers have found that brush guides not only tend to get contaminated with debris, which causes increased friction and marking of PET bottles, but also the bristles can wear quickly and/or fall out. Nolu-S is the perfect combination of extremely low friction in a tough UHMW based material. Nolu-S will not mark bottles while allowing faster speeds and greater throughput.

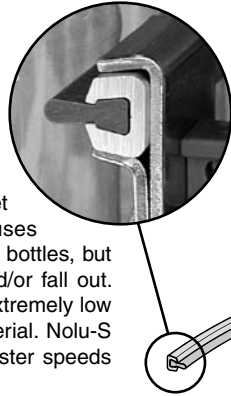




**Low friction,
non-marking!
More sanitary**

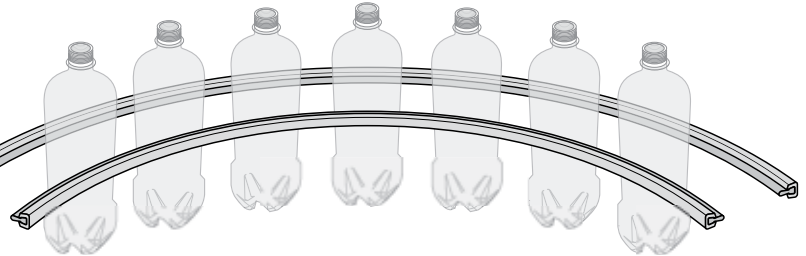

**Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.*

ABG

Aluminum Rail
Accepts all VG-PBG inserts. Works with all standard Valu Guide rail clamps.





Material: Clear anodized aluminum	
Part Number	Length (ft.)
VG-ABG-10	10
VG-ABG-20	20
VG-ABG2-10	10
VG-ABG2-20	20

PBG

Nolu-S Insert
For use with VG-ABG aluminum rail. This guide is available in the ultra low friction Nolu-S.

Replacement inserts for brushes





Material: Nolu-S	
Part Number	Length (ft.)
VG-PBG7-NS-100	100*
VG-PBG5-NS-100	100*



Nolu-SD Insert
For use with VG-ABG aluminum rail. This guide is available in the ultra low friction Nolu-SD, which combines low friction qualities with a static dissipating ability.


Reduced Splices!




Material: Nolu-SD (Anti-static material)	
Part Number	Length (ft.)
VG-PBG7-NSD-100	100*
VG-PBG5-NSD-100	100*



Nolu-SR neck guides and Nolu-S body guides, with an ultra low coefficient of friction, reduces the degree of bottle tilt and the corresponding wear problems.




Other guides (especially brushes), when contaminated, can cause irregular tilt and orientation of the bottles, resulting in blockage at curves or inclines.



Field Bendable!

Easily bent on site using a portable Valu Guide rail bender. Bends to min. 30" radius with zero crimping of aluminum which allows for continuous feed of plastic thru straights and curves with minimal splicing.

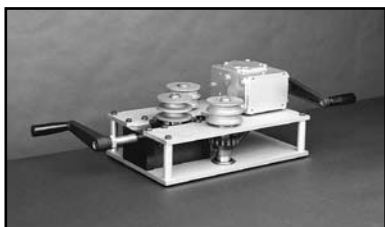

See page 211 for Valu Guide rail bender details.

	For Inside Curve		For Outside Curve	
VG-ABG-				
	VG-694-A (2)	VG-694B (1)	VG-694B (2)	VG-694-A (1)
VG-ABG2-				
	VG-694-C (2)	VG-694B (1)	VG-694B (2)	VG-694-C (1)