





# Bar Caps

**In Stock items (subject to prior sales)**




These low friction, wear resistant UHMW caps are designed to clip onto various thicknesses of flat bar material. Applications include conveyor belt supporting and conveyor side or neck guides.

VG-P116HD




1/16" or 16 ga. bar

VG-P18BC Standard



Can be used as side guides

VG-P18HD Heavy Duty

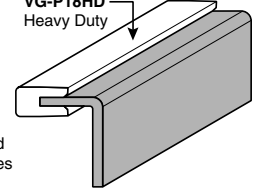


1/16" or 16 ga.



## P116SBC

Clips onto 1/16 in. or 16 ga. flat bar. Can be used as a standard belt support.



Material: UHMW


Part Number	Length (ft.)
VG-P116SBC-10	10
VG-P116SBC-20	20
VG-P116SBC-100	100*
VG-P116SBC-250	250*

1/8" 12 ga. 11 ga.



## CSI

Clips onto 12 ga. or 11 ga. flat bar. Can be used as a special belt support or neck guide.




Material: UHMW

Part Number	Length (ft.)
VG-CSI-538-10	10
VG-CSI-538-20	20
VG-CSI-538-100	100*
VG-CSI-538-250	250*

## P104D


Clips onto 1/16 in. or 16 ga. flat bar. Can be used for heavy duty applications.



VG-P104D-10	10
VG-P104D-20	20
VG-P104D-100	100*
VG-P104D-250	250*

## P204


Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a special belt support.



VG-P204-10	10
VG-P204-20	20
VG-P204-100	100*
VG-P204-250	250*

## P116HD


Clips onto 1/16 in. or 16 ga. flat bar. Can be used as a narrow belt support or for other heavy duty applications.



VG-P116HD-10	10
VG-P116HD-20	20

## P18SBC

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a standard belt support.




VG-P18SBC-10	10
VG-P18SBC-20	20
VG-P18SBC-100	100*
VG-P18SBC-250	250*

3/32" or 13 ga.



## P105R

Clips onto 3/32 in. or 13 ga. flat bar. Can be used as a neck guide.




Material: Grey Nolu-S or Grey Nolu-SR.

Part Number	Nolu-SR	Nolu-S	Length (ft.)
VG-P105R-100		•	100*
VG-P105RCL-100	•		100*
VG-P105R-250		•	250*
VG-P105RCL-250	•		250*

Nolu-SR helps guide PET containers in high speed applications.

## P18BC


Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used for standard applications.



VG-P18BC-10	10
VG-P18BC-20	20
VG-P18BC-100	100*
VG-P18BC-250	250*

## P18HD

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a narrow belt support or for other heavy duty applications.




VG-P18HD-10	10
VG-P18HD-20	20
VG-P18HD-100	100*
VG-P18HD-250	250*

\*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.




**In Stock items (subject to prior sales)**

**1/8"  
12 ga.  
11 ga.**



## P1345

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used for belt retention or support.



**Material:** UHMW

Part Number	Length (ft.)
<b>VG-P1345-10</b>	<b>10</b>
<b>VG-P1345-20</b>	<b>20</b>



**Shipping Information:** UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.


**Extended Coil Lengths:** Items marked with this symbol are available in continuous lengths of 100' or more. These items must be coiled for shipping and handling.

**3/16"  
or  
7 ga.**



## P316BC

Clips onto 3/16 flat bar. Can be used as a standard belt support.




**Material:** UHMW

Part Number	Length (ft.)
<b>VG-P316BC-10</b>	<b>10</b>
<b>VG-P316BC-20</b>	<b>20</b>
<b>VG-P316BC-100</b>	<b>100*</b>
<b>VG-P316BC-250</b>	<b>250*</b>



## P316HD

Clips onto 3/16 flat bar. Can be used as a heavy duty belt support.




**Material:** UHMW

Part Number	Length (ft.)
<b>VG-P316HD-10</b>	<b>10</b>
<b>VG-P316HD-20</b>	<b>20</b>

## P316SBC

Clips onto 3/16 flat bar. Can be used as a standard belt support.




<b>VG-P316SBC-10</b>	<b>10</b>
<b>VG-P316SBC-20</b>	<b>20</b>
<b>VG-P316SBC-100</b>	<b>100*</b>
<b>VG-P316SBC-250</b>	<b>250*</b>



## P7GABC

Clips onto 7 ga. steel. Can be used as a standard belt support. KVP equivalent wearstrip.




<b>VG-P7GABC-10</b>	<b>10</b>
<b>VG-P7GABC-20</b>	<b>20</b>
<b>VG-P7GABC-100</b>	<b>100*</b>
<b>VG-P7GABC-250</b>	<b>250*</b>



## P316TBC


Clips onto 3/16 flat bar. Can be used as a standard belt support.

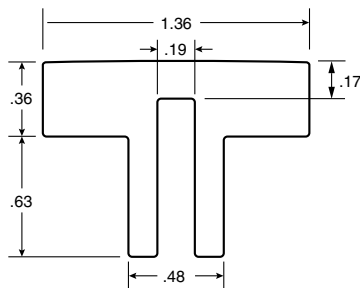

<b>VG-P316TBC-10</b>	<b>10</b>
<b>VG-P316TBC-20</b>	<b>20</b>

## P7GAHD

Clips onto 7 ga. steel. Can be used for belt retention or support. KVP equivalent wearstrip.

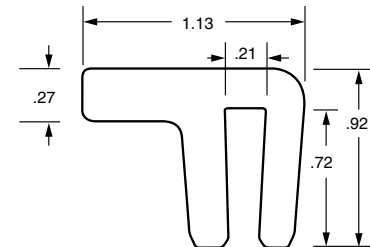

<b>VG-P7GAHD-10</b>	<b>10</b>
<b>VG-P7GAHD-20</b>	<b>20</b>

### Options available for most wear strips:



Nolu-S UHMW:  
(reduced friction)  
add "-NS-" to  
part number



Static Dissipative  
UHMW:  
add "-SD-" to  
part number




Nolu-SR  
UHMW:  
add "-SR-" to  
part number

Example:  $\downarrow$   
**VG-P316HD-NS-10**

\*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.



# Bar Caps


 In Stock items (subject to prior sales)

6 mm



## PM6BC

Clips onto 6 mm flat bar. Can be used as a standard belt support.



**Material:** UHMW

Part Number	Length (ft.)
<b>VG-PM6BC-10</b>	<b>10</b>
<b>VG-PM6BC-20</b>	<b>20</b>
<b>VG-PM6BC-100</b>	<b>100*</b>
<b>VG-PM6BC-250</b>	<b>250*</b>

### Options available for most wear strips:




Nolu-S UHMW:  
(reduced friction)  
add "-NS-" to  
part number



Static Dissipative  
UHMW:  
add "-SD-" to  
part number



Nolu-SR  
UHMW:  
add "-SR-" to  
part number

Example:   
**VG-P316HD-NS-10**


UHMW Covers &  
Aluminum Rails

1/4"



## P14TBC


Clips onto 1/4 flat bar. Can be used as a special belt support.



<b>VG-P14TBC-10</b>	<b>10</b>
<b>VG-P14TBC-20</b>	<b>20</b>
<b>VG-P14TBC-100</b>	<b>100*</b>
<b>VG-P14TBC-250</b>	<b>250*</b>

## P14BC

Clips onto 1/4 flat bar. Can be used as a standard belt support.




**Material:** UHMW

Part Number	Length (ft.)
<b>VG-P14BC-10</b>	<b>10</b>
<b>VG-P14BC-20</b>	<b>20</b>
<b>VG-P14BC-100</b>	<b>100*</b>
<b>VG-P14BC-250</b>	<b>250*</b>

## P14SBC


Clips onto 1/4 flat bar. Can be used as standard belt support.




<b>VG-P14SBC-10</b>	<b>10</b>
<b>VG-P14SBC-20</b>	<b>20</b>
<b>VG-P14SBC-100</b>	<b>100*</b>
<b>VG-P14SBC-250</b>	<b>250*</b>

## P14HD

Clips onto 1/4 flat bar. Can be used as a heavy duty belt support.



<b>VG-P14HD-10</b>	<b>10</b>
<b>VG-P14HD-20</b>	<b>20</b>

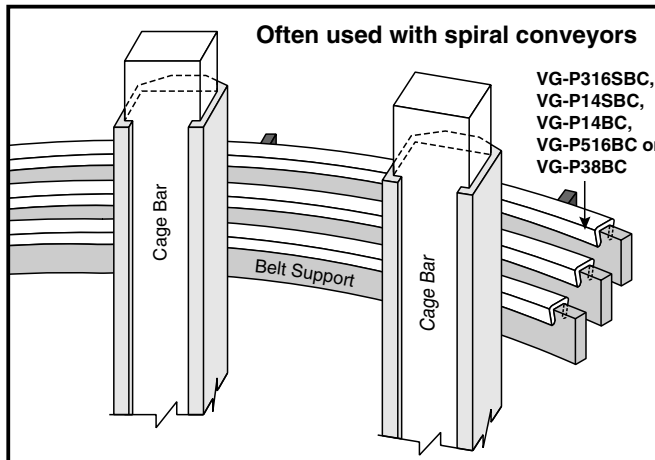

\*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.




**In Stock items (subject to prior sales)**

5/16"



## P516BC

Clips onto 5/16 flat bar. Can be used as a standard belt support.



**Material: UHMW**


Part Number	Length (ft.)
<b>VG-P516BC-10</b>	<b>10</b>
<b>VG-P516BC-20</b>	<b>20</b>
<b>VG-P516BC-100</b>	<b>100*</b>
<b>VG-P516BC-250</b>	<b>250*</b>

10 mm



## PM10BC

Clips onto 10 mm flat bar. Can be used as a standard belt support.



**Material: UHMW**


Part Number	Length (ft.)
<b>VG-PM10BC-10</b>	<b>10</b>
<b>VG-PM10BC-20</b>	<b>20</b>
<b>VG-PM10BC-100</b>	<b>100*</b>
<b>VG-PM10BC-250</b>	<b>250*</b>

3/8"



## P38BC

Clips onto 3/8 flat bar. Can be used as a standard belt support.




<b>VG-P38BC-10</b>	<b>10</b>
<b>VG-P38BC-20</b>	<b>20</b>
<b>VG-P38BC-100</b>	<b>100*</b>
<b>VG-P38BC-250</b>	<b>250*</b>

1/2"



## P12BC


Clips onto 1/2 flat bar. Can be used as a standard belt support.



<b>VG-P12BC-10</b>	<b>10</b>
<b>VG-P12BC-20</b>	<b>20</b>
<b>VG-P12BC-100</b>	<b>100*</b>
<b>VG-P12BC-250</b>	<b>250*</b>


## P38HD

Clips onto 3/8 flat bar. Can be used as an extra wide heavy duty belt support.



<b>VG-P38HD-10</b>	<b>10</b>
<b>VG-P38HD-20</b>	<b>20</b>

VG-P38BC

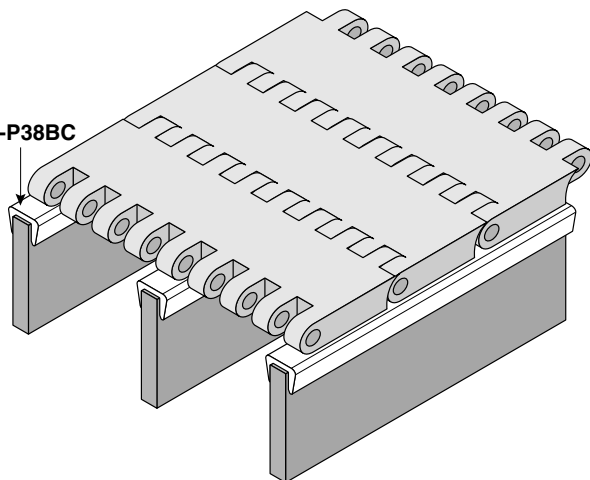

**Shipping Information:** UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.

**Extended Coil Lengths:** Items marked with this symbol are available in continuous lengths of 100' or more. These items must be coiled for shipping and handling.



\*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.